




FOAMED PVC QUARTER ROUND


Our 402 Series Quarter Round is designed to stylishly cover the space that exists between finished flooring and walls.

Surface Material:
Extruded Foam PVC




Installation - Extruded Foam Quarter Rounds

- 1 Install your flooring with any underlayment and leave the gap between the flooring and the wall as indicated by the manufacturer's instructions, but less than 1/2", so to leave room for the quarter round to sit flush on the floor.

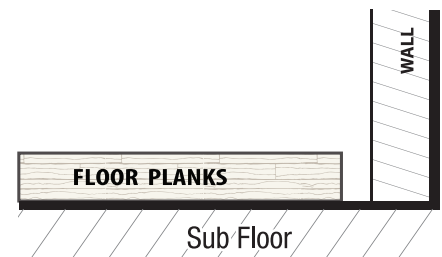

- 2 If using adhesive, run a thin bead against the back of the Quarter Round and attach it to the wall where desired. If using adhesive only, it is a good idea to prop a heavy weight against the Quarter Round so that it will stay on the wall until the adhesive is set. (typically about 24 hours.)

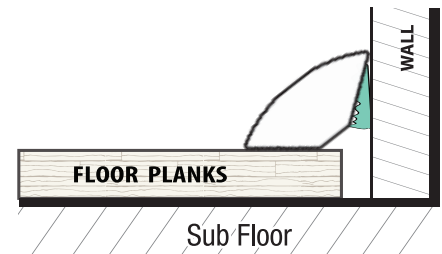

OPTIONAL STEP

- 3 Finishing nails can also be used to secure the Quarter Round in place, spaced every 16" through the Quarter Round and into the wall.

